

DIMAX 540 APP B


Item no.: 5400230

theben

Time and light control
Dimmer

Description

- *Available august 2025*
- Flush-mounted dimmer for R and C loads
- No neutral conductor necessary
- Can be controlled and programmed via Bluetooth using an app or push-button
- Can be networked and expanded via Bluetooth mesh
- Light scenes and astro program
- App for Android and iOS
- Optimised settings for LEDs and incandescent lamps
- Small design, perfect for retrofitting
- Completely encapsulated electronics
- Temperature cut-off
- Overcurrent cut-off
- Short-circuit fuse
- Memory function saves the most recently set light level value and then dims to this value the next time it is switched on
- Function minimum brightness (10% in state of delivery, adjustable)

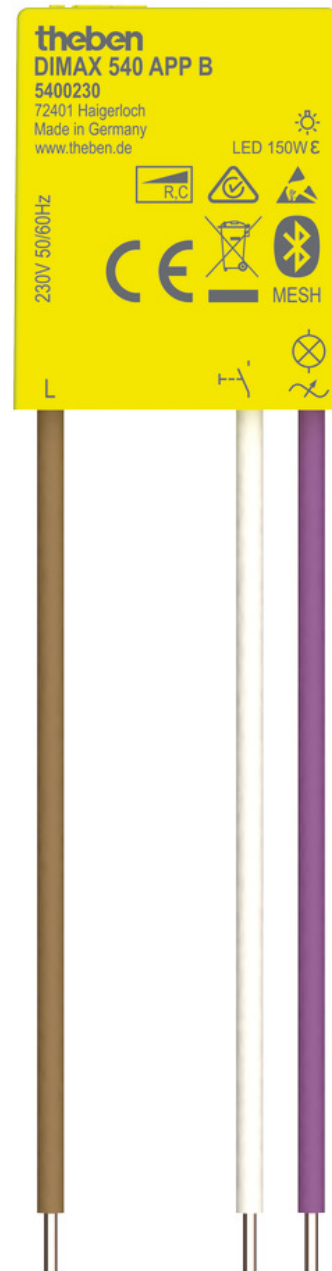

Subject to technical changes and misprints

additional information at: www.theben.de/product/5400230

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

DIMAX 540 APP B


Item no.: 5400230




Technical data

| DIMAX 540 APP B | | DIMAX 540 APP B | |
|--------------------------------|---------------|------------------------|----------------|
| Operating voltage | 230 V AC | Programmierung per App | ✓ |
| Frequency | 50 - 60 Hz | Setting | App |
| Installation type | Flush-mounted | Max. cable length | 100 m |
| Stand-by consumption | < 0.5 W | Ambient temperature | -10°C ... 45°C |
| Incandescent/halogen lamp load | 150 W | | |
| LED lamp 2-8 W | 150 W | | |

Connection example



Scale drawings

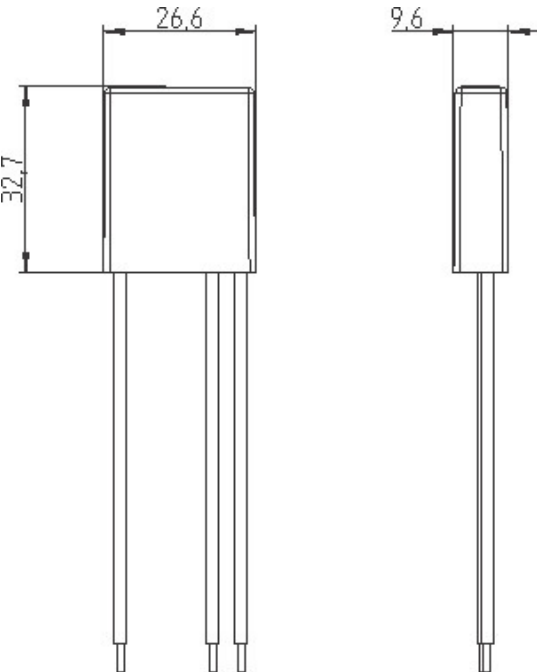

DIMAX 540 APP B

Item no.: 5400230

theben

Accessories

Compensation module LED

Item no.: 9070825

