
DIMAX 540 BN

Item no.: 5400134

Time and light control
Dimmer

Description

- Flush-mounted dimmer for R and C loads
- Cable length of up to 100 m possible, also suitable for two-way circuits with larger distances and multiple push buttons
- Easier selection of the optimal dimming value thanks to extended dimming speed of 5 seconds
- Optimised settings for LEDs and incandescent lamps
- Function minimum brightness (10% in state of delivery, adjustable)
- Small design, perfect for retrofitting
- Completely encapsulated electronics
- Temperature cut-off
- Overcurrent cut-off
- Short-circuit fuse
- Memory function saves the most recently set light level value and then dims to this value the next time it is switched on
- With softstart/softstop function
- Dimensions 32,7 x 26,6 x 9,6 mm

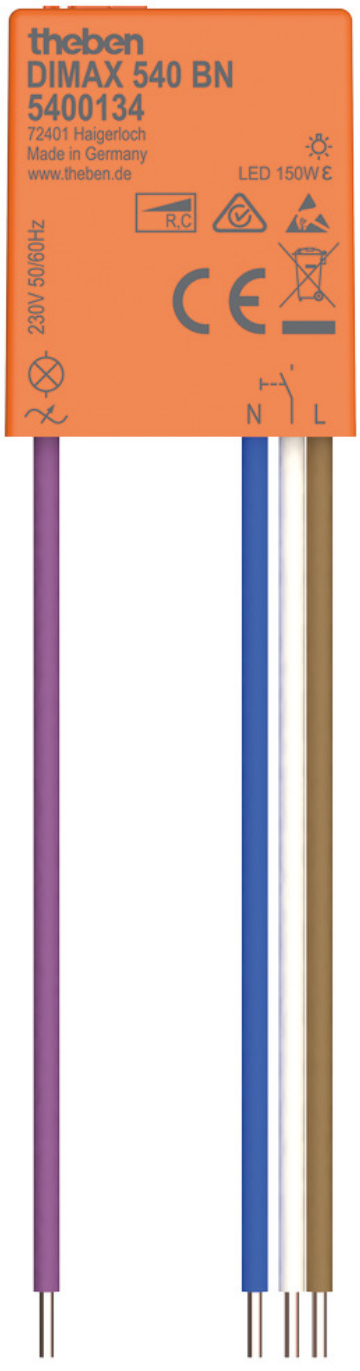

DIMAX 540 BN


Item no.: 5400134

Technical data


	DIMAX 540 BN
Operating voltage	230 V AC
Frequency	50 - 60 Hz
Installation type	Flush-mounted
Stand-by consumption	~0,34 W
Incandescent/halogen lamp load	150 W

	DIMAX 540 BN
LED lamp 2-8 W	150 W
Setting	Push-button
Max. cable length	100 m
Ambient temperature	-10°C ... 45°C

Wiring Diagrams

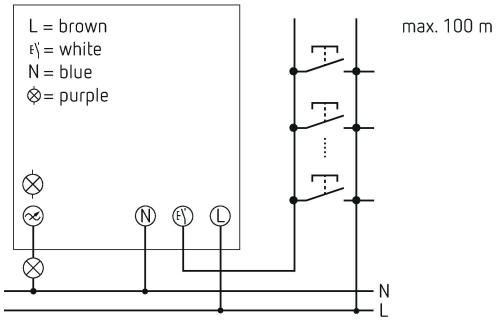

Scale Drawings

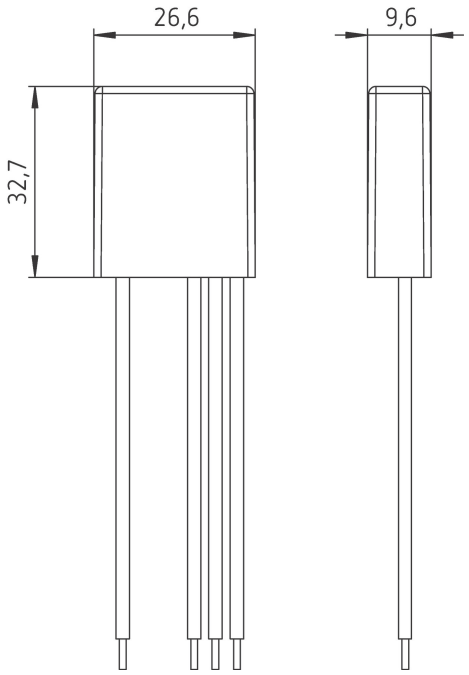

Accessories

Compensation module LED
Item no.: 9070825